

**EMCO**

**EMCOMILL 1200 / 750**

**3-axes CNC machining centres**

**EMCOMILL 750**

**EMCOMILL 1200**



# PERFORMANCE AND FLEXIBILITY WRAPPED IN A COMPACT DESIGN

The flexible, vertical CNC milling machine for 3-axis milling work has a compact machine layout, a travel of 1200 mm in the X-axis, 610 mm in the Y-axis, the latest control technology, as well as a very attractive price-performance ratio. The solid fixed table and large work area enable the machining of heavy workpieces weighing up to 1500 kg.



Reverse mould  
(Aluminium)

## 1 TOOL DRUM

- / Tool drum with 30, 40 or 60 stations (chain magazin)
- / Quick release with double-gripper

## 2 WORK AREA

- / Large machine doors
- / Optimum view into the work area
- / Protected, elevated guide systems
- / Fixed table for high workpiece weights

## 3 MACHINE BASE

- / Machine bed made of a special ribbed welded steel construction



Machine with optional equipment

## 4 CONTROL

- / Cutting-edge digital control technology
- / SIEMENS 828D with ShopMill
- / Heidenhain TNC620
- / FANUC Oi-MF with Manual Guide i and 3D-graphic
- / Colour monitor

## 5 SPINDLE

- / Mechanical spindle 12000 rpm
- / Water-cooled motor spindle 15000 rpm



# PERFORMANCE AND FLEXIBILITY WRAPPED IN A COMPACT DESIGN

With a travel of 750 mm in the X-axis and a maximum workpiece weight of 800 kg, the EMCOMILL 750 is the smaller version of the EMCOMILL 1200. A compact machine design, generous work area and maximum stability are just some of its excellent features.



Intermediate bell  
(Aluminium)

## 1 TOOL DRUM

- / Tool drum with 30, 40 or 60 stations (chain magazin)
- / Quick release with double-gripper

## 2 WORK AREA

- / Large machine doors
- / Optimum view into the work area
- / Protected, elevated guide systems
- / Fixed table for high workpiece weights

## 3 MACHINE BASE

- / Machine bed made of a special ribbed welded steel construction



Machine with optional equipment

## 4 CONTROL

- / Cutting-edge digital control technology
- / SIEMENS 828D with ShopMill
- / Heidenhain TNC620
- / FANUC Oi-MF with Manual Guide i and 3D-graphic
- / Colour monitor

## 5 SPINDLE



- / Mechanical spindle 12000 rpm
- / Water-cooled motor spindle 15000 rpm

# TECHNICAL HIGHLIGHTS



The EMCOMILL is equipped with state-of-the-art control technology, either Siemens 828D with ShopMill, Heidenhain TNC 620 or Fanuc Oi-MF with Manual Guide i are available. The control panel includes a swivel function for an ergonomic working position.

## APPLICATION AREAS

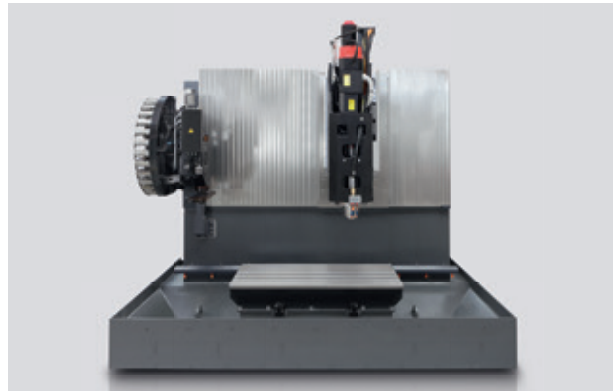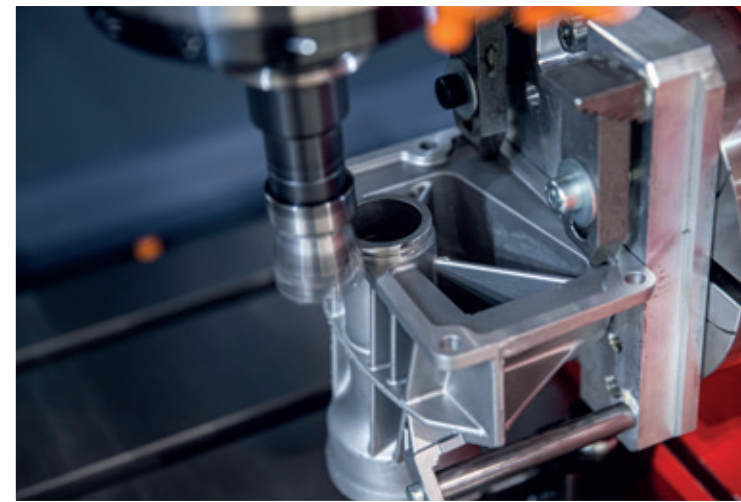

### DESIGN

The new EMCOMILL 1200 and EMCOMILL 750 series is designed as a moving column milling machine. The machine bed is made in welded steel, optimised by FEM analysis. The X-, Y- and Z-slides are made in cast iron.




### MACHINING TABLE

Cast iron fixed table with T-grooves, on which clamping systems can be installed. Due to the rigid table, automation solutions with robot or pallet changer can be perfectly integrated. Large-dimension workpieces can be machined, achieving high accuracy thanks to the moving column technology.

## HIGHLIGHTS

- / High-performance milling spindles
- / Flexible tool system
- / Large work area with wide machine doors
- / Solid fixed table for workpiece weights up to 1500 kg
- / State-of-the-art control technology from Siemens, Heidenhain, Fanuc
- / Large number of options
- / Best price-performance ratio
- / Made in the Heart of Europe

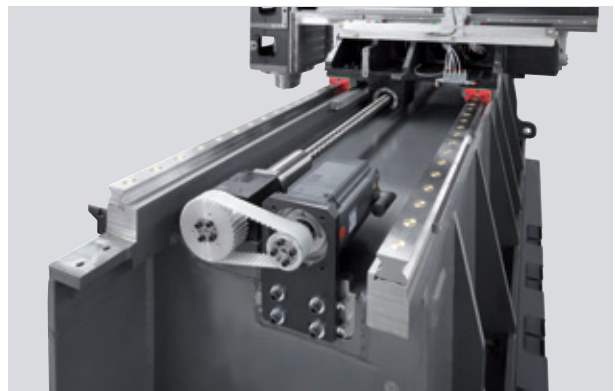


### BALL SCREWS

Grease-lubricated (central) ball screws and linear roller guides (45 mm in the X- and Y-axes; 35 mm in the Z-axis) offer high resistance against mechanical stress and a high, zero-vibration traverse speed. On the picture, machine equipped with linear scales (option).



### TOOL MAGAZINE

The tool magazine has 30 stations (40/60 as option). The tool management with random tool selection uses a double-gripper that allows to make a pre-search of the tool during the machining cycle. Alternatively it is possible to utilise the tool magazine with a fixed place for big-dimensioned tools, leaving the two adjacent stations free.

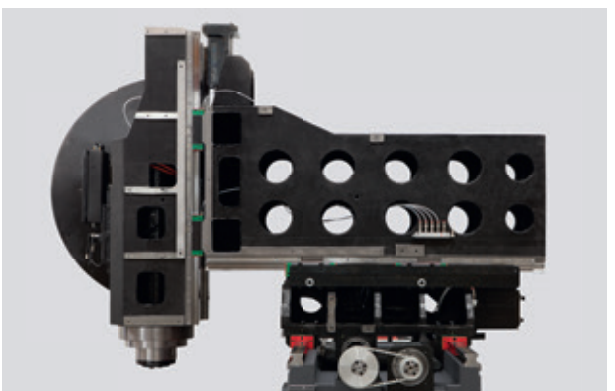

### SOLID STRUCTURE

Optimised on the basis of FEM analyses and made of cast iron, the guide retainers, carriages and spindle carriers ensure maximum stability and perfectly finished workpieces.




# TECHNICAL HIGHLIGHTS




## HIGH-PERFORMANCE SPINDLE

You can choose between two variants for different areas of application: 12,000 rpm (direct drive) or 15,000 rpm (motor spindle).

## Power and Torque

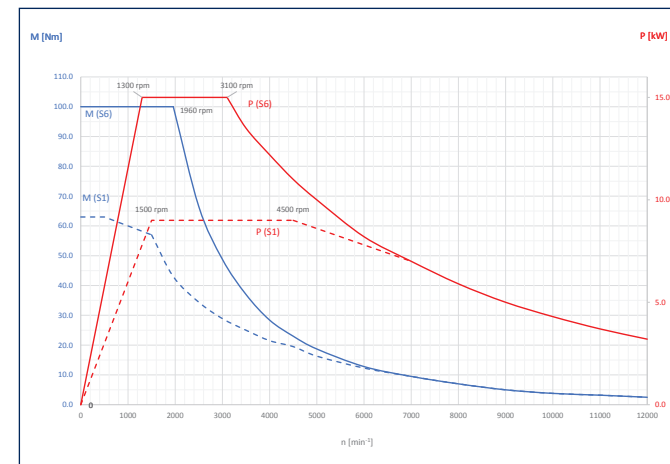

Mechanical spindle

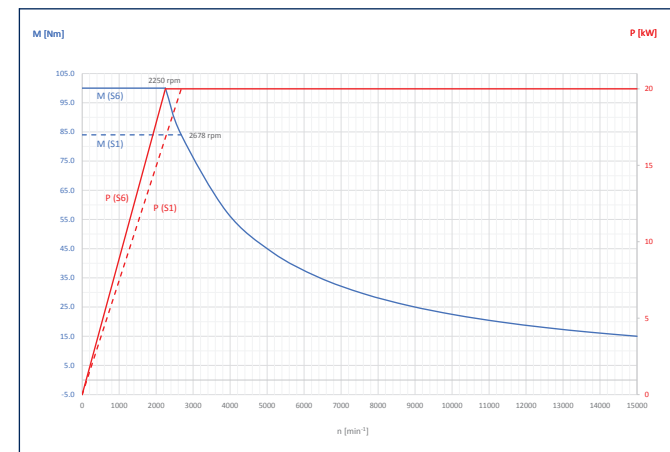


Motor spindle



## SIDE TOOL MAGAZINE DOOR

The side tool magazine door allows fast loading and unloading, as well as control and cleaning of the tools.

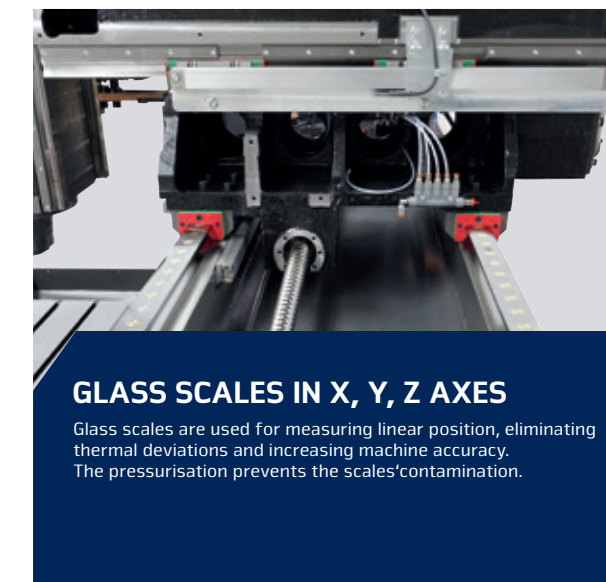

## GLASS SCALES IN X, Y, Z AXES

Glass scales are used for measuring linear position, eliminating thermal deviations and increasing machine accuracy. The pressurisation prevents the scales' contamination.



## ROTARY TABLE

As a 4<sup>th</sup> axis, a rotary table with a diameter of 200 mm is available, offering up to 0.001° precise resolution and NC-interpolation. Other sizes on request.



## HINGE-TYPE CHIP CONVEYOR

The chips created by the machining processes are transported to the hinge-type chip conveyor and automatically removed from the machine into a container provided by the customer.

## OPTIONS

- / Tool magazine with 40 or 60 stations
- / Tool holder ISO 40 / BT 40 / HSK-A63
- / NC-rotary table
- / Glass scales in all axes
- / Handwheel
- / Alarm status lamp
- / Control cabinet cooling unit
- / Automatic tool measuring
- / Coolant and air through the spindle
- / Bandpass filters with high pressure pumps




## MEASURING SYSTEMS

Both the measurement of the tool to reduce the set-up time during tool change as well as the measurement of the workpiece in order to check dimensions or to determine zero points, is optionally possible within the machine by means of a radio or a laser bridge.

# INSTALLATION PLAN


## EMCOMILL 1200

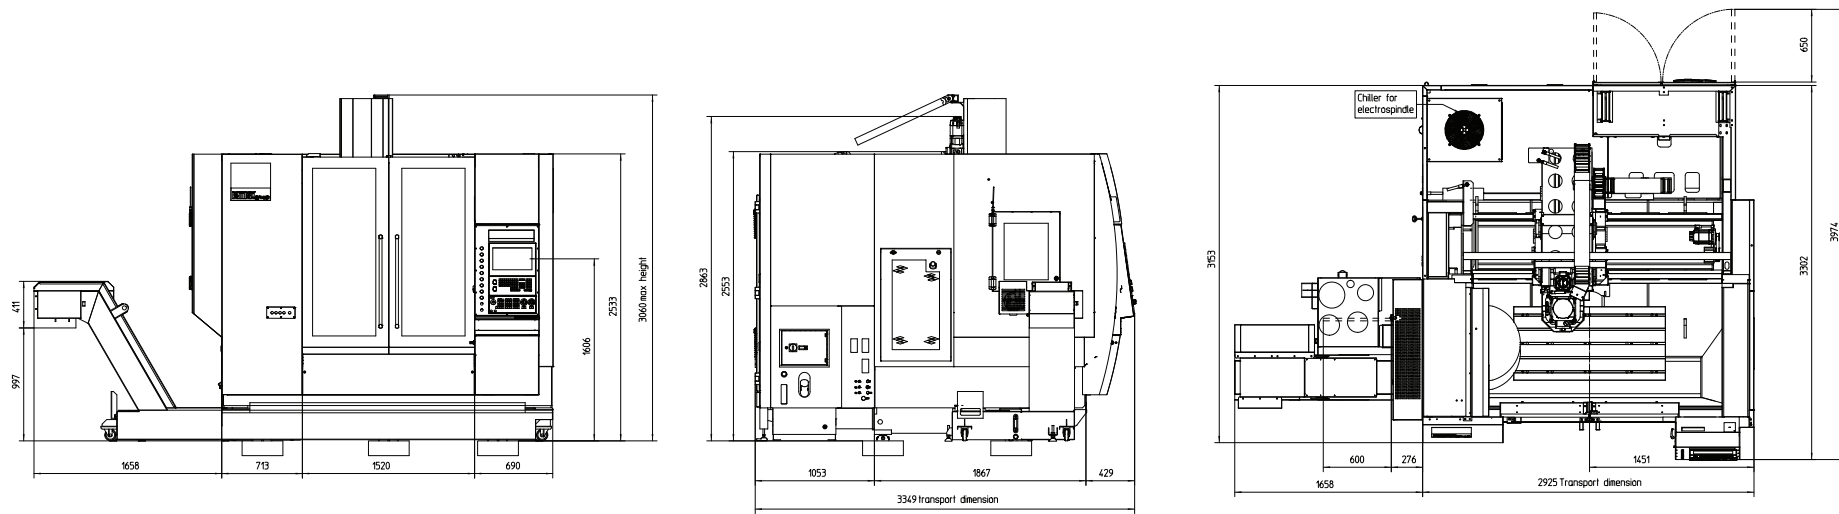

Details in millimeters

# INSTALLATION PLAN


## EMCOMILL 750

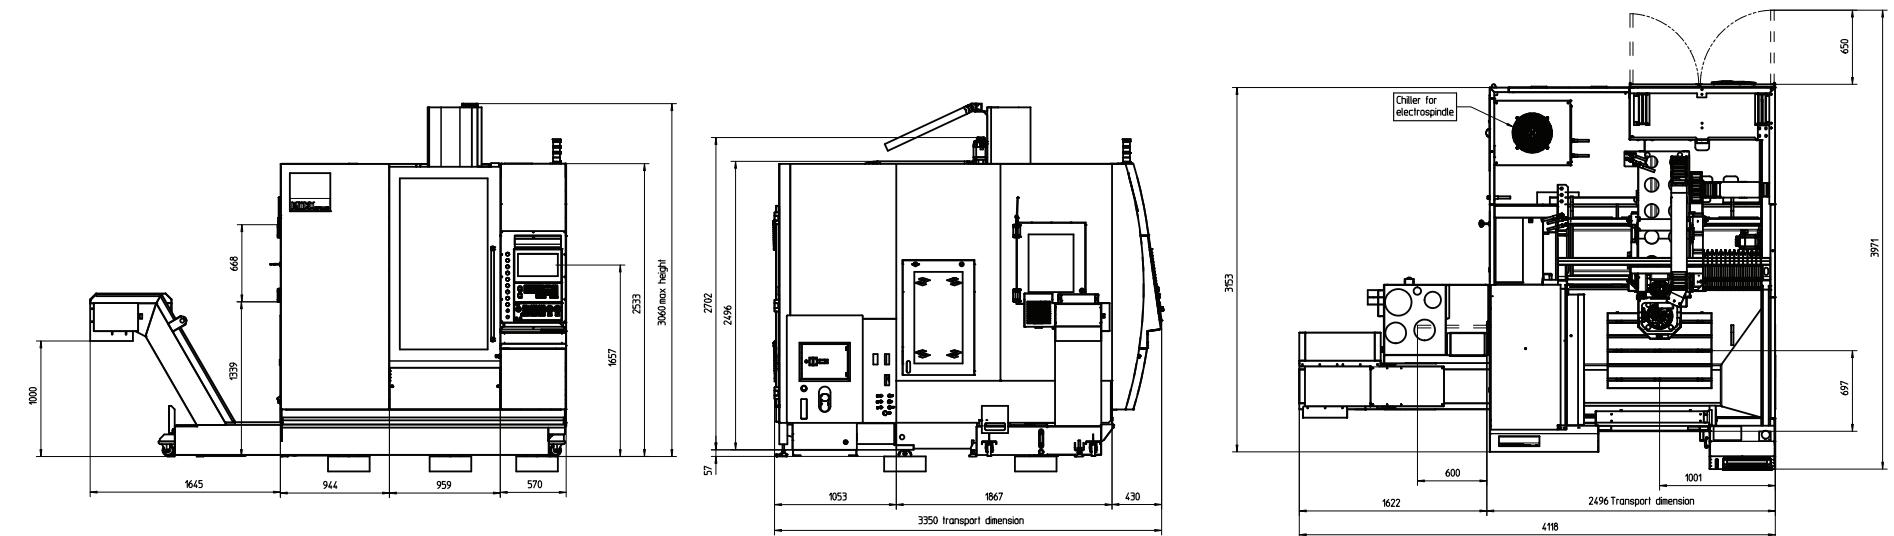

Details in millimeters

# WORK AREA


EMCOMILL 1200

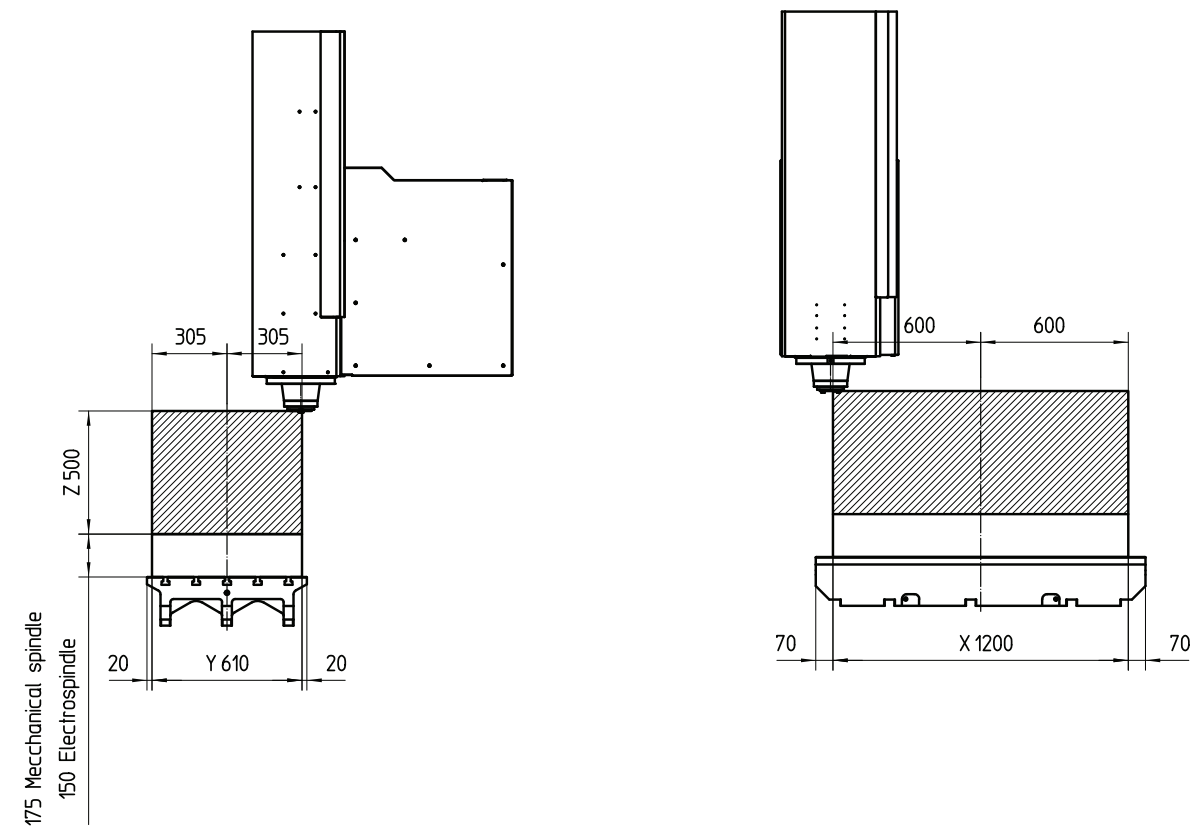

Details in millimeters

# WORK AREA

EMCOMILL 750

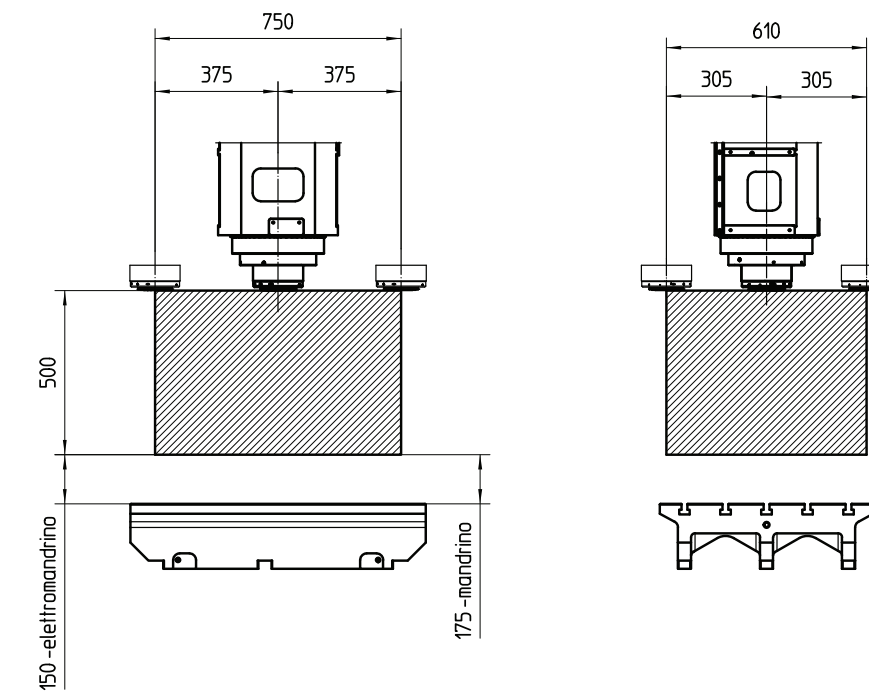

Details in millimeters

# TECHNICAL DATA

Work area	EMCOMILL 750	EMCOMILL 1200
Travel in X - axis	750 + 50 mm	1200 + 50 mm
Travel in Y - axis	610 mm	610 mm
Travel in Z - axis	500 mm	500 mm
Min./max. motor spindle nose-table distance (Mechanical spindle)	175 / 675 mm	175 / 675 mm
Min./max. motor spindle nose-table distance (Motor spindle)	150 / 650 mm	150 / 650 mm

## Table

Table dimensions length / width	900 / 650 mm	1340 / 650 mm
T-grooves: number, width, spacing	5 x 18 x 125 mm	5 x 18 x 125 mm
Max. table load	800 kg	1500 kg
Distance table surface / floor	790 mm	800 mm

## Main spindle (Direct drive)

Speed range	50 – 12000 rpm	50 – 12000 rpm
Torque (S6)	100 Nm	100 Nm
Spindle motor power (S6)	15 kW	15 kW
Tool holder (DIN 69871)	ISO 40 (BT 40)	ISO 40 (BT 40)
Drive	Direct drive	Direct drive

## Main spindle (Motor spindle)

Speed range	50 – 15000 rpm	50 – 15000 rpm
Torque S6	100 Nm	100 Nm
Spindle motor power S1 / S6	20 kW	20 kW
Tool holder (DIN 69871)	ISO40 (BT40, HSK-A63)	ISO40 (BT40, HSK-A63)

Tool change	EMCOMILL 750	EMCOMILL 1200
Number of tool stations	30 (40/60)	30 (40/60)
Tool change time (tool / tool)	2 sec	2 sec
Max. tool diameter	80 mm	80 mm
Max. tool diameter (with empty station)	125 mm	125 mm
Max. tool length	250 mm	250 mm
Max. tool weight	8 kg	8 kg

## Axes

Rapid motion speed in X, Y, Z	30 m/min	30 m/min
Feed force in X, Y, Z	5000 N	5000 N
Axis acceleration in X, Y, Z	3 m/s <sup>2</sup>	3 m/s <sup>2</sup>

## General data

Power supply	20 kVA	20 kVA
Overall height	3060 mm	3060 mm
Installation area W × D (without chip conveyor, with tank)	2770 x 3350 mm	3200 x 3350 mm
Total weight of the machine	7500 kg	10000 kg
Compressed air required	6 bar	6 bar



beyond standard /

EMCO GmbH / Salzburger Str. 80 / 5400 Hallein-Taxach / Austria / T +43 6245891-0 / F +43 624586965 / info@emco.at

[www.emco-world.com](http://www.emco-world.com)